



2026

PRODUCT CATALOG

Main Categories: LED Pixel Lights, LED Strip Lights, LED Landscape Lights, LED Window Lights, LED Controllers, LED Wall Lights, and LED Neon Lights.

Catalog Overview

Catalog Overview	1
Controller Series	2
Permanent LED Lighting Series	3-6
LED Modular Light Series	7
LED Recessed Light Series	7
LED Strip Light Series	8
LED Neon Rope Light Series	8
LED Set Series	9
Swimming Pool Under-Water Lamp Series.....	10
Controller System Series.....	11-12
Outdoor Landscape Lighting Series	13
LED Wall Light	14
LED Wall Washer Light Series	15
Brass Landscape Lighting Series	16
Signal Amplifier and Sample Display Box Series	17
Aluminum Pixel Light Track	18
Connector and Extension Cable Series	19

Smart LED Controller

PRODUCT DESCRIPTION


The Smart LED Controller provides precise control over LED brightness, colors, and dynamic lighting effects. It is ideal for architectural lighting, holiday displays, landscape lighting, and commercial projects, allowing users to create customized, vibrant lighting effects with ease.

KEY FEATURES

Compatible with both iOS and Android, the controller supports Wi-Fi and Bluetooth connectivity for convenient and reliable control. Through the app, users can adjust brightness and colors, switch lighting modes, synchronize the lights with music, use voice control, create custom effects, set schedules, share devices, configure motion-triggered effects, and activate real-time sports lighting modes. It is suitable for everyday lighting, holiday displays, parties, and smart-home applications.

UL[®] LISTED
E483482
GLMD901

FC
2A7ZD-
GLMD901

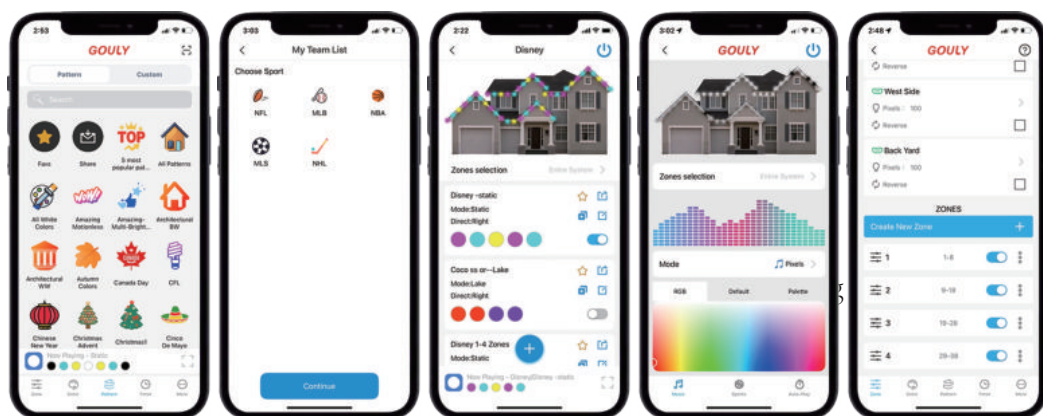

Download on the
App Store

ANDROID APP ON
Google play



GLMD901-1

Output Channels: 1
Output voltage: DC5V / DC 12-36 V / DC 48 V
Control: Cloud-Based App Controller
Connectivity: 2.4 GHz Wi-Fi and Bluetooth
IP Rank: IP44
Dimensions: 85 × 85 × 25.5mm
Operating Temperature: -40°C to 50°C



GLMD901-Mini

Output Channels: 1
Output voltage: DC5V / DC 12-36 V / DC 48 V
Control: Cloud-Based App Controller
Connectivity: 2.4 GHz Wi-Fi and Bluetooth
IP Rank: IP44
Dimensions: 93 × 43.5 × 21.3mm
Operating Temperature: -40°C to 50°C



GLMD903-1

Output Channels: 4
Output voltage: DC5V / DC 12-36 V / DC 48 V
Control: Cloud-Based App Controller
Connectivity: 2.4 GHz Wi-Fi and Bluetooth
IP Rank: IP44
Dimensions: 144 × 85 × 26.5mm
Operating Temperature: -40°C to 50°C



GLMD904-1 Mini

Output Channels: 1
Output voltage: DC5V / DC 12-36 V / DC 48 V
Control: Cloud-Based App Controller
Connectivity: 2.4 GHz Wi-Fi and Bluetooth
IP Rank: IP65
Dimensions: 105 × 48 × 19.8mm
Operating Temperature: -40°C to 50°C



GLMD905-1

Output: Wireless Signal Output
Output voltage: DC5V / DC 12-36 V / DC 48 V
Control: Cloud-Based App Controller
Connectivity: 2.4 GHz Wi-Fi and Bluetooth
IP Rank: IP44
Dimensions: 144 × 85 × 26.5mm
Operating Temperature: -40°C to 50°C



GLMD906-1

Live Sports Effects: Supported
Motion Detection: Supported
Output Channels: 4
Output voltage: DC5V / DC 12-36 V / DC 48 V
Control: Cloud-Based App Controller
Connectivity: 2.4 GHz Wi-Fi and Bluetooth
IP Rank: IP44
Dimensions: 144 × 85 × 26.5mm
Operating Temperature: -40°C to 50°C



GLMD907-1

Matter: Supported
Live Sports Effects: Supported
Motion Detection: Supported
Output Channels: 4
Output voltage: DC5V / DC 12–36 V / DC 48 V
Control: Cloud-Based App Controller
Connectivity: 2.4 GHz Wi-Fi and Bluetooth
IP Rank: IP44
Dimensions: 148 × 103 × 26.5mm
Operating Temperature: -40°C to 50°C



LED Permanent Light Series

OEM/ODM Services Available

GLMD176

LED Quantity: 3pcs SMD 5050 RGB
IC Model: WS2811
Voltage(V): DC 12 V
Power(W): 0.72W
Color: RGB color-changing
IP Rating :IP68
Beam Angle:120°
Size(mm): 42 × 32 × 15.5 mm
Mounting Hole Diameter: Ø30 mm
Notes:1 Pc/string Or 5 Pcs/string



GLMD176-RGBW-12V

LED Quantity: 3pcs SMD5050
IC Model: UCS2904
Voltage(V): DC 12 V
Power(W): 0.96W
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:120°
Size(mm): 42 × 32 × 15.5 mm
Mounting Hole Diameter: Ø30 mm
Notes:1 Pc/string Or 5 Pcs/string



GLMD176-RGBW-24V

LED Quantity:3pcs SMD5050
Power(W):0.96W
IC Model:UCS2904
Size(mm):42 × 2 × 16 mm
Mounting Hole Diameter: Ø30 mm
Voltage(v):DC 24 V
IP Rating:IP68
Color: RGBW Chasing light
Notes:1 Pc/string Or 5 Pcs/string



GLMD176-RGBW-5054-24V

LED Quantity: 3pcs smd5054RGB
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 0.96W
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:120°
Size(mm): 42 × 32 × 15.5 mm
Mounting Hole Diameter: Ø30 mm
Notes:1 Pc/string Or 5 Pcs/string



GLMD176-RGBW-36V

LED Quantity: 3pcs SMD 5050 RGB
IC Model: UCS2904
Voltage(V): DC 36 V
Power(W): 0.96W
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:120°
Size(mm): 42 × 32 × 15.5 mm
Mounting Hole Diameter: Ø30 mm
Notes:1 Pc/string Or 5 Pcs/string



GLMD176-RGBW-7604-36V

LED Quantity: 3 LEDs 5050RGBW
IC Model: UCS7604
Voltage(V): DC 24 - 36 V
Power(W): 0.96 W/pc, 4.8W/M
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:100°
Size(mm): 42 × 32 × 15.5 mm
Mounting Hole Diameter: Ø30 mm
Notes:1 Pc/string Or 5 Pcs/string



GLMD176-BZ

LED Quantity:3pcs SMD5050
Power:0.96W
IC Model:UCS2904
Size(mm):40 × 40mm
Mounting Hole Diameter:Ø37mm
Color: RGBW Chasing light
Voltage(v):DC 12 V
IP Rating:IP68
Notes:1000pcs/MOQ, 1/5/10tpcs/String



GLMD177

LED Quantity:SMD5050RGB
Color: RGB Chasing light
Power:1.44W
IC Model:UCS1903/UCS2904
Size(mm):58 × 66 × 18.2mm
Mounting Hole Diameter: Ø30 mm
Voltage(v):DC 24 V
IP Rating:IP68
Configuration: 1 pc/string or 5 pcs/string



GLMD183

LED Quantity:6PCS/M
Power:0.72W
IC Model:SM16703
Size(mm):Ø43MM
Color:RGB Chasing light
Voltage(v):DC 12 V
IP Rating:IP67
Notes:30pcs/5M



GLMD184

LED Quantity: 4PCSSMD 5050RGBW
Power:1.2W
IC Model:UCS2904
Size(mm):Ø50X77mm
Color: RGBW Chasing light
Voltage(v):DC 24 V-36V
IP Rating:IP67
Notes:5pcs/M



GLMD190

LED Quantity: 1PCSSMD 5050RGBW
/2PCSSMD 3030RGBW
IC Model: SK6812RGBW/UCS2904
Voltage(V): DC 12 V
Power(W): 0.5W /1W
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:120°
Size(mm): Ø25X58mm
Notes:5pcs/strip



GLMD190-T-24V-3030

LED Quantity: 2PCSSMD 3030RGBW
IC Model: UCS2904
Voltage(V): DC12/24V
Power(W): 1W
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:120°
Size(mm): 175 × 37 × 26mm
Notes:5pcs/strip



GLM193-RGBW-36V

LED Quantity:1pcs smd5054RGB
+3LED W
Power:1.6W/pcs
IC Model:UCS2904
Size(mm):42 × 30.2 × 16mm
Mounting Hole Diameter:Ø15mm
Voltage(v):DC 36 V
IP Rating:IP68
Color: RGBW color-changing light
Notes:5pcs/strip



GLMD194

LED Quantity:1pcs smd5054RGB
Power:1W,0.5W/pcs
IC Model:UCS2904
Size(mm):42 × 30.2 × 16mm
Mounting Hole Diameter:Ø12.5mm
Voltage(v):DC12/24V
IP Rating:IP68
Color: RGBW color-changing light
Notes:5pcs/strip,50pcs/strip



GLMD196-3led

LED Quantity: 3 × SMD 5050
RGBW LEDs
IC Model: UCS7604
Voltage(V): DC 48 V
Power(W): 1.02W/pcs, 5.1 W/m
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:100°
Size(mm): 45 × 32 × 15.5mm
Mounting Hole Diameter: Ø25.3mm
Notes:1 pc/strip or 5 pcs/strip



GLMD197-36V-RGBW

LED Quantity: 6LEDs 2835W
+1LED 5054RGB
IC Model: UCS2905
Voltage(V): DC 36 V
Power(W): 1.5W/pcs
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:18°
Size(mm): Ø40 × H17.5 mm
Mounting Hole Diameter: Ø38mm
Notes:1pcs/strip,3pcs/strip,5pcs/strip



GLMD-199

LED Quantity: 6 × SMD 2835 white
LEDs + 1 × SMD 5054 RGB LED
IC Model: UCS2905
Voltage(V): DC 36 V
Power(W): 1.5W/pcs, 7.5W/M
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:108°
Size(mm): 38 × 32.5 × 16.3mm
Mounting Hole Diameter: Ø30 mm
Notes:1pcs/strip,3pcs/strip,5pcs/strip



GLMD-200

LED Quantity: 6pcs smd3535RGB
+3000K
IC Model: UCS7604
Voltage(V): DC 48 V
Power(W): 1.02W/pcs, 5.1 W/m
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:120°
Size(mm): 45 × 34 × 16mm
Mounting Hole Diameter: Ø30 mm
Notes:1 pc/strip or 5 pcs/strip



GLMD-202

LED Quantity: 3 × SMD 5050 RGBW LEDs
IC Model: UCS7604
Voltage(V): DC 48 V
Power(W): 1.02W/pcs, 5.1 W/m
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:100°
Size(mm): 54.3 × 31.3 × 15.5mm
Mounting Hole Diameter: Ø30 mm
Notes:1 pc/strip or 5 pcs/strip




GLMD204

LED Quantity: 2LEDs 5054RGBW
IC Model: UCS2904B
Voltage(V): DC 24 V
Power(W): 1W/pcs, 5W/M
Color: RGBW color-changing
IP Rating :IP65
Beam Angle:240°
Size(mm): 48 × 15.3 × 12.4mm
Notes:1 pc/strip or 5 pcs/strip



GLMD206

LED Quantity: 3pcs smd2835RGB
+1PCS2016 3000K
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 0.7W/pcs
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:360°
Size(mm): 41 × 20 × 24mm
Mounting Hole Diameter: Ø12.5mm
Notes:1 pc/strip or 5 pcs/strip



GLMD207

LED Quantity: 6 × SMD 2835 RGB LEDs
+ 6 × SMD 2016 warm-white LEDs
IC Model: UCS7604
Voltage(V): DC 36 V
Power(W): 1.08W/pcs, 5.4W/M
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:108°
Size(mm): 52 × 44 × 30 mm
Mounting Hole Diameter: Ø41MM
Notes:1 pc/strip or 5 pcs/strip



GLMD215

LED Quantity: 6pcs smd3535RGB+3000K
IC Model: UCS7604
Voltage(V): DC 48 V
Power(W): 0.7W/pcs
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:120°
Size(mm): 53 × 35 × 20mm
Mounting Hole Diameter: Ø30 mm
Notes:1 pc/strip or 5 pcs/strip



GLMD216

LED Quantity: 3pcs smd3528RGB
+smd2016 3000K
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 0.96W
Color: RGBW color-changing
IP Rating :IP68
Size(mm): 50 × 20 × 18mm
Mounting Hole Diameter: Ø20mm
Notes:1 pc/strip or 5 pcs/strip



GLMD210

LED Quantity: 26 × SMD 2835 RGB LEDs
+ 6 × SMD 2016 warm-white LEDs
IC Model: UCS2904
Voltage(V): DC 36 V
Power(W): 1.2W/pcs, 6W/M
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:100°
Size(mm): 44 × 31.5 × 26mm
Mounting Hole Diameter: Ø30 mm
Notes: 1 pc/strip or 5 pcs/strip



GLMD211

LED Quantity: 3 LEDs 5050RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 0.96 W/pc, 4.8W/M
Color: RGBW color-changing
IP Rating :IP68
Size(mm): 44 × 31.5 × 14.5mm
Mounting Hole Diameter: Ø30 mm
Notes: 1 pc/strip or 5 pcs/strip



GLMD215

LED Quantity: 6pcs smd3535RGB+3000K
IC Model: UCS7604
Voltage(V): DC 48 V
Power(W): 1.02W
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:100°
Size(mm): 53 × 35 × 20mm
Mounting Hole Diameter: Ø30 mm
Notes: 1 pc/strip or 5 pcs/strip



GLMD216

LED Quantity: 3pcs smd3528RGB
+smd2016 3000K
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 0.96W
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:100°
Size(mm): 50 × 20 × 18mm
Mounting Hole Diameter: Ø20mm
Notes: 1 pc/strip or 5 pcs/strip



GLMD222

LED Quantity: 1pcs smd5054RGB+6PCS 3000K
IC Model: UCS7604
Voltage(V): DC 48 V
Power(W): 1.02W
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:100°
Size(mm): 53 × 35 × 20mm
Mounting Hole Diameter: Ø30 mm
Notes: 1 pc/strip or 5 pcs/strip



GLMD197-HDK

LED Quantity: 6LEDs 2835W
+1LED 5054RGB
IC Model: UCS2904B
Voltage(V): DC 24 V
Power(W): 1.2W/pcs
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:90°
Size(mm): Ø38 × L82 x W56 x H39 mm
Mounting Hole Diameter: Ø38mm
Notes:1pcs/strip,3pcs/strip,5pcs/strip



GLMD185-N

LED Quantity: 6LEDs 2835W
+1LED 5054RGB
IC Model: UCS2904B
Voltage(V): DC 24 V
Power(W): 1.2W/pcs
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:108°
Size(mm): Ø40 × L48 x W42 x H79 mm
Mounting Hole Diameter: Ø38mm
Notes:1pcs/strip,3pcs/strip,5pcs/strip



GLMD181

LED Quantity: 3 × SMD 5050 RGBW LEDs
IC Model: UCS2904
Voltage(V): 12V
Power(W): 0.96W
Color: RGBW color-changing
IP Rating :IP65
Size(mm): G45 × 92mm
Notes: 1 Pc/string Or 5 Pcs/string



GLMD181-T

LED Quantity: 3 × SMD 5050 RGBW LEDs
IC Model: UCS2904
Voltage(V): 12V
Power(W): 0.96W
Color: RGBW color-changing
IP Rating :IP65
Size(mm): G45 × H215mm
Notes: 15pcs/String/9.15M



GLMD181-T-D

LED Quantity: 3 × SMD 5050 RGBW LEDs
IC Model: UCS2904
Voltage(V): 12V
Power(W): 0.96W
Color: RGBW color-changing
IP Rating :IP65
Size(mm): G45 × H215mm
Notes: 15 pcs/string, 15 m total length



GLMD203-T

LED Quantity: 3PCSCW SMD2016
+3PCSWW SMD2016+1PCS5054RGBW
IC Model: UCS2905
Voltage(V): DC24-36V
Power(W): 1.55W/pcs
Color: RGBW color-changing
IP Rating :IP65
Beam Angle:120°
Size(mm): Ø45 × H215 mm
Notes:15pcs/strip



GLMD208

LED Quantity: 1PCS SMD5054RGB
+6 PCS SMD2016 Warm white
IC Model: UCS2904
Voltage(V): DC 36 V
Power(W): 1.08W/pcs
Color: RGBW color-changing
IP Rating :IP65
Size(mm): 91 × 75 × 42mm
Embossed logo:Custom logo supported
Notes: 15pcs/strip



GLMD212

LED Quantity: 1PCS SMD5054RGB
+3 PCS SMD2016 Warm white
+3 PCS SMD2016 Cool white
IC Model: UCS2905
Voltage(V): DC 36 V
Power(W): 1w/pcs
Color: RGBW color-changing
IP Rating :IP68
Beam Angle:120°
Notes: 15pcs/strip



GLMD213

LED Quantity: 1PCS SMD5054RGB
+6 PCS SMD2016 Warm white
IC Model: UCS2904
Voltage(V): DC 36 V
Power(W): 1.08W/pcs
Color: RGBW color-changing
IP Rating :IP65
Size(mm): 91 × 75 × 42mm
Mounting Hole Diameter: Ø25.3MM
Embossed logo:Custom logo supported
Notes: 15pcs/strip



LED Modular Light Series

Engineered for high energy efficiency, this LED module reduces power consumption while maintaining excellent brightness and consistent color Output. Its high luminous efficacy and low heat Output help reduce energy consumption and operating costs. Its energy-efficient design makes it suitable for offices, shopping malls, hotels, exhibitions, and outdoor lighting projects.


GLMD192

LED Type:SMD5050
LED Qty(pcs):3LED
Voltage(V):DC 12 V
Beam Angle:160°
Color:RGB color-changing
IP Rating:IP68
Power(W):0.72W
IC Model:UCS1903
Size(mm):76 × 19 × 13.2mm
electrical characteristic:Constant Current




GLMD166

LED Type:SMD5050
LED Qty(pcs):6LED
Voltage(V):DC 24 V
Beam Angle:120°
Size(mm):60 × 28.3 × 10.6mm
IP Rating:IP68
Power(W):1.44W
Color:RGB color-changing
electrical characteristic:cconstant voltage

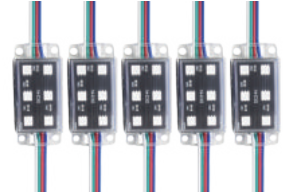


GLMD160

LED Type:SMD5050
LED Qty(pcs):3 LED
Voltage(V):DC 12 V
Beam Angle:120°
Size(mm):73.5 × 15.4 × 10.8mm
IP Rating:IP68
Power(W):0.72W
IC Model:WS2811
Color:RGB color-changing
electrical characteristic:constant voltage




GLMD163

LED Type:SMD5050
LED Qty(pcs):6LED
Voltage(V):DC 24 V
Beam Angle:120°
Size(mm):73.5 × 15.4 × 10.8mm
IP Rating:IP68
Power(W):1.2W
IC Model:2903N
Color:RGB color-changing
electrical characteristic:Constant Current

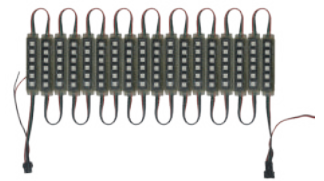

GLMD167

LED Type:SMD5050
LED Qty(pcs):6LED
Voltage(V):DC 24 V
Beam Angle:120°
Size(mm):60 × 28.3 × 10.6mm
IP Rating:IP68
Power(W):1.44W
type:U2903N
Color:RGB color-changing
electrical characteristic:constant voltage

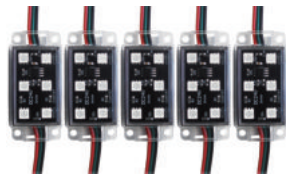

GLMD164-RGB

LED Type:SMD5050 RGB
LED Qty(pcs):1LED
IC Model: WS2811
Voltage(V): 12V-24V
Power(W): 0.5W/pcs
Color: RGB color-changing
IP Rating :IP68
Beam Angle:160°
Size(mm): 27 × 17.2 × 11.7mm



LED Recessed Light Series

The recessed lighting provides versatile overhead illumination for residential and commercial applications. Our recessed downlight system offers a refined appearance and straightforward installation. It provides uniform illumination that highlights architectural details and enhances the appearance of homes and commercial buildings.

SF10W/15W-RGBW

LED Quantity:SMD5050RGBW
Power:10W/15W
IC Model:UCS2904B
IP Rating:IP65
Voltage(v):DC 12 V/24V
Luminous Angle:120°
Size(mm):85 × 150 × 213MM,140 × 140 × 83mm
Opening size:Ø100-Ø105MM,Ø130-Ø135mm
Shell Color:Silver/ White/Black
Color: RGBW chasing color



SF5W-RGBW

LED Quantity:SMD5050RGBW
Power:5W
Voltage(v):DC 12V
ICtype:UCS2904B
IP Rating:IP67
Luminous Angle:120°
Size(mm):Ø195 × H17mm
Shell Color:White/Black
Color: RGBW chasing color



LED Strip Light Series

This high-efficiency LED strip light offers low power consumption and can reduce energy use by up to 80% compared with traditional lighting. Its stable performance and low heat Output support reliable, long-lasting operation. The RGBW strip provides vivid color mixing and dynamic effects, including chasing, flowing, flashing, and rolling effects, with full dimming control. It is ideal for homes, kitchens, cabinets, bedrooms, parties, and commercial spaces. Flexible, durable, and easy to install, it is a versatile lighting solution for residential and commercial applications.

GLCOB

LED Quantity: 320PCS/M, 384pcs/M, 480PCS/M
528pcs/M, 608pcs/M, 840pcs/M
Input Voltage(V): DC5V/12V/24V
Color Temperature(CCT): 2800-3200K
Power(W): 8W/M, 10W/M, 11W/M, 14W/M, 7.5+7.5W/M
Widths: 8mm
Cutting Interval: 12V/25mm, 24V/50mm
IP Rating: IP20, P67, P68
Functions: Stepless dimming and flowing light effects



GLCOBRGB

LED Quantity: 672pcs/M, 720PCS/M, 840pcs/M
Input Voltage(V): DC12/24V
Color: RGB color-changing
IC Model: WS2811
Power(W): 15W/M, 21W/M
Cutting Interval: 50mm
IP Rating: IP20, P67, P68



GLMD6812-144

LED Quantity: 144PCS/M
IC number: 144PCS/M
IC Model: SK6812/WS2812B
Voltage: DC5V
Max power: 43.2W/M
PCB width: 12mm
Grayscale: 256
Color: RGBW/RGB
IP Rating: IP20, IP65, IP67, IP68




ST5050RGBW-2904

LED Type: SMD 5050 RGBW
LED Quantity: 60LED/M; 15 LED can be cut
Voltage(V): DC24/48V
Power(W): 14.4W/M, 14W/M
IC Model: UCS2904
Color: RGB color-changing
Material: Silicone
IP Rating: IP20, IP65, IP67, IP68
Beam Angle: 120°
Dimensions (L x W x H): 5000 x 10 x 5mm, 5000 x 10 x 5mm



LED neon rope

OEM/ODM Services Available

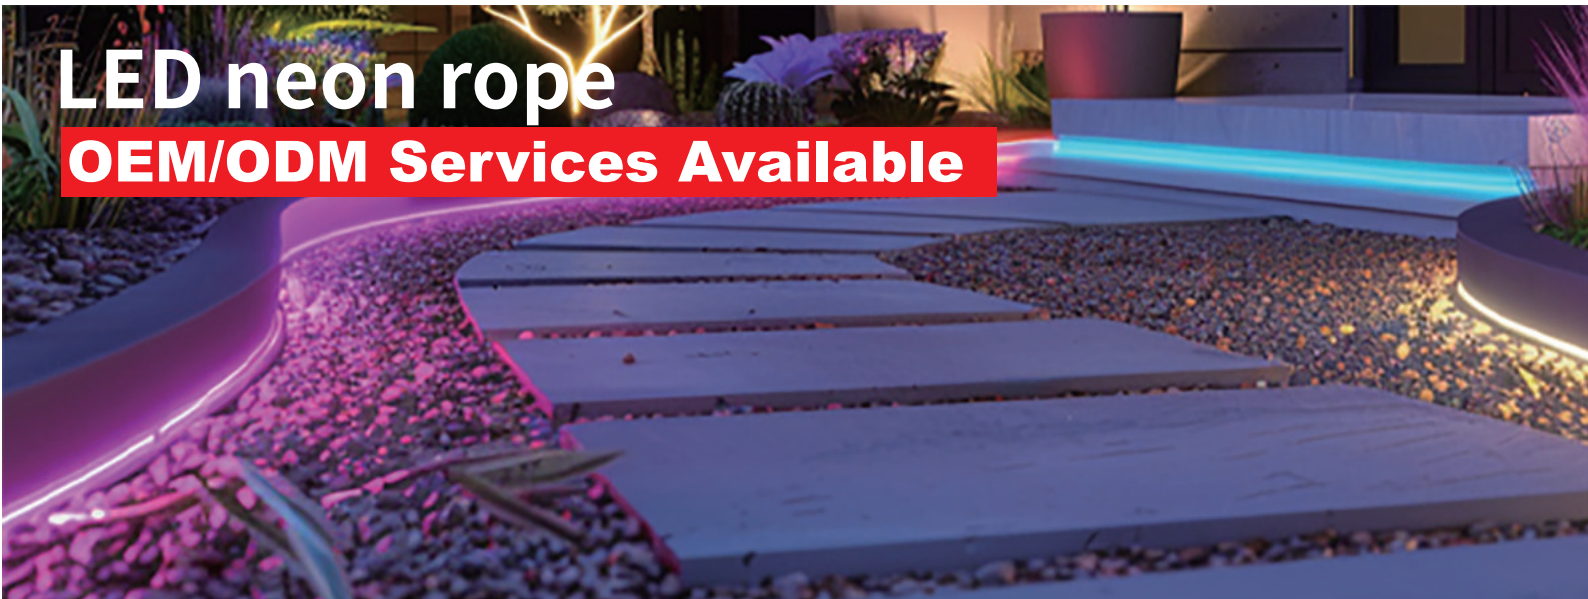

NE5050W60-2811

LED Quantity: 60leds/M
IC number: 20PCS/M
Connector and Extension
Cable Series: WS2811
Voltage: DC 12 V/DC 24 V
Max power: 14.4W/M
Grayscale: 256
Cutting Interval: 50 mm
Color: Full RGB color-changing
IP Rating: IP67



NE5050W60-2801

LED Quantity: 60leds/M
IC number: 10PCS/M
Connector and Extension
Cable Series: WS2801
Voltage: DC 12 V/DC 24 V
Max power: 14.4W/M
Grayscale: 256
Length per set: 100mm
Color: Full RGB color-changing
IP Rating: IP67



NE5050W60-2904

LED Quantity: 60leds/M
IC number: 20PCS/M
Connector and Extension
Cable Series: UCS2904
Voltage: DC 12 V/DC 24 V
Max power: 14.4W/M
Grayscale: 256
Cutting Interval: 50 mm
Color: Full RGB color-changing
IP Rating: IP67



LED Set Series

Transform your home with a permanent outdoor LED lighting system designed for every occasion. Install the lights along eaves, fences, and corridors, or use them inside cabinets and wardrobes to create a coordinated lighting design that stands out day and night.

GLMD181-SET

LED Quantity: 15pcs, 24pcs/string
Power: 15W, 0.72W/pcs
IC Model: UCS2904
Size(mm): G45 x 92mm
Voltage(V): AC 100–240 V
IP Rating: IP65
Color: RGBW color-changing light
Notes: 36W/75w power supply+mini controller+ LED bulbs+Retail color box



GLMD181-T-SET

LED Quantity: 15pcs, 24pcs/string
Power: 15W, 0.72W/pcs
IC Model: UCS2904
Size(mm): Ø45 x H215mm
Voltage(V): AC 100–240 V
IP Rating: IP65
Color: RGBW color-changing light
Notes: 36W/75W power supply+mini controller+ LED bulbs+Retail color box



GLMD-197-SET

LED Quantity: 36/72/108PCS LEDs/string
IC Model: UCS2905
Voltage(V): DC 36 V
Power(W): 54W/108W/162W/set
Color: RGBW color-changing
IP Rating :IP68
Beam Angle: 108°
Size(mm): Ø40 x H17.5 mm
Mounting Hole Diameter: Ø21mm



GLMD5050-RGB-PR2

LED Quantity: 36pcs, 54pcs, 96pcs/string
IC Model: WS2811
Voltage(V): DC 12V
Power(W): 9W, 13W, 23W/M
Color: RGBW color-changing
IP Rating :IP68
Size(mm): 1.2mmX1.6M, 1.2mmX0.9M, 1.2mmX0.6M
Packing size : 370 x 250 x 60mm
Set: 96pcs/string x 2, 54pcs/string x 2, 36pcs/string x 2, LED controller x 1, 18AWG Wire Harness. Length=2M x 1, Y-connector cable x 1



GLMD220-set

LED Quantity: 36/72/108PCS LEDs/string
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 0.96W/pcs
Color: RGBW color-changing
IP Rating :IP68
Beam Angle: 90°
Size(mm): Ø20 x L40 x W30 x H15 mm



GLMD193-RGB/RGBW-set

LED Quantity: 36/72/108PCS
LEDs/String
Power: 100W/set
IC Model: UCS1903/UCS2904
Size(mm): 342 x 30.2 x 16 mm
Voltage(V): AC100-240V
IP Rating: IP68
Color: RGB/RGB
WLength: 50ft/100ft/150ft
12PCS/String



NE5050W60-2904-DIY-set

LED Quantity: 60leds/M
Power: 20PCS/M
IC Model: UCS2904
Voltage: DC 24 V
Max power: 12W/M
Grayscale: 300
Color: RGBW color-changing light
IP Rating: IP67
Cutting Interval: 50 mm
Dimensions: 5000 x 12 x 18 mm



GLMD5050-RGB-PR1

LED Quantity: 36pcs, 54pcs, 96pcs/string
IC Model: UCS2904
Voltage(V): DC 12V
Power(W): 9W, 13W, 23W/M
Color: RGBW color-changing
IP Rating :IP68
Size(mm): 1.2mmX1.6M, 1.2mmX0.9M, 1.2mmX0.6M
Packing size : 370x250x60mm
Set: 96pcs/string x 2, 54pcs/string x 2, 36pcs/string x 2, LED controller x 1, 18AWG Wire Harness. Length=2M x 1, Y-connector cable x 1



GLMD218-set

LED Quantity: 100PCS LEDs/string
IC Model: UCS2904
Input : AC110V-240V
Output : 12V=3500mA
Power Consumption: 10.2 W per 100 LEDs
Color: 3000K + RGBW color-changing
IP Rating :IP68
Length(M): 10m
Set: String Light 10M x 1, RF Remote x 1, Mini Waterproof Controller x 1, Power Adapter x 1, Extension Cable x 1, Retail Package x 1



SMPL-6W-85

LED Type: COB RGBW
INPUT: AC100-240V
Output: DC 24 V
Power(W): 6W
Color: RGBW color-changing
Control Method: Wireless Control
IP Rating :IP44
Beam Angle: 120°
Size(mm): Ø85 x H83mm
Opening size : Ø75mm
Operating Temperature (°C): 40°C-60°C
Wireless Sync Range: Up to 20 m
Set: 3.35 inch 5 PCS



SMPL-10W-120

LED Type: 18PCS5054RGBW
INPUT: AC100-240V
Output: DC 24 V
Power(W): 10W
Color: RGBW color-changing
Control Method: Wireless Control
IP Rating :IP44
Beam Angle: 120°
Size(mm): Ø120 × H30mm
Opening size : Ø95mm
Operating Temperature (°C): 40°C-60°C
Wireless Sync Range: Up to 20 m
Set: 4.72 inch 5 PCS



SMPL-15W-180

LED Type: 30PCS5054RGBW
INPUT: AC100-240V
Output: DC 24 V
Power(W): 15W
Color: RGBW color-changing
Control Method: Wireless Control
IP Rating :IP44
Beam Angle: 120°
Size(mm): Ø180 × H30mm
Opening size : Ø160mm
Operating Temperature (°C): 40°C-60°C
Wireless Sync Range: Up to 20 m
Set: 7.09 inch 5 PCS



Swimming Pool Under-Water Lamp Series

The Swimming Pool Underwater Light Series is designed for high-end swimming pools, water features, and commercial lighting projects. Featuring RGBW full-color illumination, a safe 24V DC low-voltage design, and an IP68 waterproof rating, it delivers soft, uniform underwater lighting. Its recessed installation provides a clean, elegant appearance while ensuring reliable long-term underwater performance, creating a natural, comfortable, and sophisticated lighting atmosphere for any pool environment.

UDPL-16W-01

LED Type: SMD5054RGBW/108PCS
IC Model: UCS7604/9PCS
Voltage(V): DC 24 V
Power(W): 16W
Color: RGBW color-changing
Material: SUS 304 Stainless Steel
IP Rating :IP68
Beam Angle: 120°
Size(mm): Ø216 × H35mm
Operating Temperature: -20°C to 50°C



UDPL-16W-02

LED Type: SMD5054RGBW/108PCS
IC Model: UCS7604/9PCS
Voltage(V): DC 24 V
Power(W): 16W
Color: RGBW color-changing
Material: SUS 304 Stainless Steel
IP Rating :IP68
Beam Angle: 120°
Size(mm): Ø214 × H34mm
Operating Temperature: -20°C to 50°C



UDPL-22W-01

LED Type: SMD5054RGBW/216PCS
IC Model: UCS7604/9PCS
Voltage(V): DC 24 V
Power(W): 22W
Color: RGBW color-changing
Material: SUS 304 Stainless Steel
IP Rating :IP68
Beam Angle: 120°
Size(mm): Ø230 × H35mm
Operating Temperature: -20°C to 50°C



UDPL-22W-02

LED Type: SMD5054RGBW/216PCS
IC Model: UCS7604/9PCS
Voltage(V): DC 24 V
Power(W): 22W
Color: RGBW color-changing
Material: SUS 304 Stainless Steel
IP Rating :IP68
Beam Angle: 120°
Size(mm): Ø230 × H31mm
Operating Temperature: -20°C to 50°C



FT18W-RGBW-24V

LED Type: SMD5054RGBW/6PCS
IC Model: UCS2904/1PCS
Voltage(V): DC 24 V
Power(W): 18W
Color: RGBW color-changing
Material: SUS 304 Stainless Steel
IP Rating :IP68
Beam Angle: 15°
Size(mm): Ø135 × H74mm
Opening size : Ø27mm
Operating Temperature: -20°C to 50°C



SU6W-RGBW-24V

LED Type: SMD5054RGBW/6PCS
IC Model: UCS2904/1PCS
Voltage(V): DC 24 V
Power(W): 6W
Color: RGBW color-changing
Material: SUS 304 Stainless Steel
IP Rating :IP68
Beam Angle: 15°
Size(mm): Ø135 × H113mm
Operating Temperature: -20°C to 50°C



Controller System Series

- OEM & ODM Services Available -

Designed for 12 V, 24 V, 36 V, and 48 V DC lighting systems, these control boxes feature comprehensive built-in protection. Built-in overload, overtemperature, and short-circuit protection, together with a power-on self-test, helps ensure stable and safe operation.

Equipped with Wi-Fi and Bluetooth controllers, the system supports cloud-based app control, allowing users to adjust colors, dynamic modes, and schedules with ease.

GLMD171-W-12V

Product Name: Lighting Control System
Custom Illuminated Logo: Supported
Output per Channel: 5 A / 60 W,
Input Voltage (v): AC100-240V
Rated Power: 350 W / 450 W / 600 W
Size (mm): 292 × 206 × 105.5mm
Output voltage: DC 12 V
Material: Fiberglass-Reinforced PC
Flame-Retardant Rating: UL 94 V-2
Notes: Waterproof box+Meanwell power supply
+gouly Controller+Protection Circuit+Carton packaging



GLMD174-W-24V

Product Name: Lighting Control System
Custom Illuminated Logo: Supported
Output per Channel: 5 A / 60 W,
Input Voltage (v): AC100-240V
Rated Power: 350 W / 450 W / 600 W
Size (mm): 292 × 206 × 105.5mm
Output voltage: DC 24 V
Material: Fiberglass-Reinforced PC
Flame-Retardant Rating: UL 94 V-2
Notes: Waterproof box+Meanwell power supply
+gouly Controller+Protection Circuit+Carton packaging



GLMD177-W-36V

Product Name: Lighting Control System
Custom Illuminated Logo: Supported
Output per Channel: 5 A / 60 W,
Input Voltage (v): AC100-240V
Rated Power: 350 W / 450 W / 600 W
Size (mm): 292 × 206 × 105.5mm
Output voltage: DC 36 V
Material: Fiberglass-Reinforced PC
Flame-Retardant Rating: UL 94 V-2
Notes: Waterproof box+Meanwell power supply
+gouly Controller+Protection Circuit+Carton packaging



GLMD179-W-48V

Product Name: Lighting Control System
Custom Illuminated Logo: Supported
Parameter: 600W/set Output 10.5A/route,
504W/route
Input Voltage (v): AC100-240V
Output voltage: 600W
Size (mm): 292 × 206 × 105.5mm
Output voltage: DC 48 V
Material: Fiberglass-Reinforced PC
Flame-Retardant Rating: UL 94 V-2
Notes: Waterproof box+Meanwell power supply
+gouly Controller+Protection Circuit+Carton packaging



GLMD179-W-48V

Product Name: Lighting Control System
Custom Illuminated Logo: Supported
Parameter: 1200W/set Output 7A/route,
336W/route
Input Voltage (v): AC100-240V
Output voltage: 1200W
Size (mm): 292 × 206 × 105.5mm
Output voltage: DC 48 V
Material: Fiberglass-Reinforced PC
Flame-Retardant Rating: UL 94 V-2
Notes: Waterproof box+Meanwell power supply
+gouly Controller+Protection Circuit+Carton packaging



GLMD171-W-12V-PRO

Product Name: Lighting Control System
Custom Illuminated Logo: Supported
Output per Channel: 5 A / 60 W,
Input Voltage (v): AC100-240V
Rated Power: 350 W / 450 W / 600 W
Size (mm): 292 × 206 × 105.5mm
Output voltage: DC 12 V
Material: Fiberglass-Reinforced PC
Flame-Retardant Rating: UL 94 V-2
Notes: Waterproof box+Meanwell power supply
+gouly Pro Controller+Protection Circuit
+4-wire terminal block+Carton packaging



GLMD174-W-24V-PRO

Product Name: Lighting Control System
Custom Illuminated Logo: Supported
Output per Channel: 5 A / 60 W,
Input Voltage (v): AC100-240V
Rated Power: 350 W / 450 W / 600 W
Size (mm): 292 × 206 × 105.5mm
Output voltage: DC 24 V
Material: Fiberglass-Reinforced PC
Flame-Retardant Rating: UL 94 V-2
Notes: Waterproof box+Meanwell power supply
+gouly Pro Controller+Protection Circuit
+4-wire terminal block+Carton packaging



GLMD177-W-36V-PRO

Product Name: Lighting Control System
Custom Illuminated Logo: Supported
Output per Channel: 5 A / 60 W,
Input Voltage (v): AC100-240V
Rated Power: 350 W / 450 W / 600 W
Size (mm): 292 × 206 × 105.5mm
Output voltage: DC 36 V
Material: Fiberglass-Reinforced PC
Flame-Retardant Rating: UL 94 V-2
Notes: Waterproof box+Meanwell power supply
+gouly Pro Controller+Protection Circuit
+4-wire terminal block+Carton packaging



GLMD179-W-48V-PRO

Product Name: Lighting Control System
Custom Illuminated Logo: Supported
Parameter: 600W/set Output 10.5A/route,
504W/route
Input Voltage (v): AC100-240V
Output voltage: 600W
Size (mm): 292 × 206 × 105.5mm
Output voltage: DC 48 V
Material: Fiberglass-Reinforced PC
Flame-Retardant Rating: UL 94 V-2
Notes: Waterproof box+Meanwell power supply
+gouly Pro Controller+Protection Circuit
+4-wire terminal block+Carton packaging



GLMD179-W-48V-PRO

Product Name: Lighting Control System
Custom Illuminated Logo: Supported
Parameter: 1200W/set Output 7A/route,
336W/route
Input Voltage (v): AC100-240V
Output voltage: 1200W
Size (mm): 292 × 206 × 105.5mm
Output voltage: DC 48 V
Material: Fiberglass-Reinforced PC
Flame-Retardant Rating: UL 94 V-2
Notes: Waterproof box+Meanwell power supply
+gouly Pro Controller+Protection Circuit
+4-wire terminal block+Carton packaging



Controller System Series

- OEM & ODM Services Available -

Designed for 12 V, 24 V, 36 V, and 48 V DC lighting systems, these control boxes feature comprehensive built-in protection. Built-in overload, overtemperature, and short-circuit protection, together with a power-on self-test, helps ensure stable and safe operation.

Equipped with Wi-Fi and Bluetooth controllers, the system supports cloud-based app control, allowing users to adjust colors, dynamic modes, and schedules with ease.

WB171-W-12V

Product Name: Lighting Control System
Logo Customization: Available
Output per Channel: 5 A / 60 W,
Input Voltage (v):AC100-240V
Rated Power: 350 W / 450 W / 600 W
Size (mm):324.65 × 217.28 × 137.5mm
Output voltage:DC 12 V
Notes:Waterproof box+Meanwell power supply
+gouly Controller+Protection Circuit+Carton packaging



WB171-W-24V

Product Name: Lighting Control System
Logo Customization: Available
Output per Channel: 5 A / 60 W,
Input Voltage (v):AC100-240V
Rated Power: 350 W / 450 W / 600 W
Size (mm):324.65 × 217.28 × 137.5mm
Output voltage:DC 24 V
Notes:Waterproof box+Meanwell power supply
+gouly Controller+Protection Circuit+Carton packaging



WB171-W-36V

Product Name: Lighting Control System
Logo Customization: Available
Output per Channel: 5 A / 60 W,
Input Voltage (v):AC100-240V
Rated Power: 350 W / 450 W / 600 W
Size (mm):324.65 × 217.28 × 137.5mm
Output voltage:DC 36 V
Notes:Waterproof box+Meanwell power supply
+gouly Controller+Protection Circuit+Carton packaging



WB171-W-48V

Product Name: Lighting Control System
Logo Customization: Available
Parameter:600W/set Output10.5A/route,
504W/route
Input Voltage (v):AC100-240V
Output voltage:600W
Size (mm):324.65 × 217.28 × 137.5mm
Output voltage:DC 48 V
Notes:Waterproof box+Meanwell power supply
+gouly Controller+Protection Circuit+Carton packaging



WB171-W-48V-1200W

Product Name: Lighting Control System
Logo Customization: Available
Parameter:1200W/set Output7A/route,
336W/route
Input Voltage (v):AC100-240V
Output voltage:1200W
Size (mm):324.65 × 217.28 × 137.5mm
Output voltage:DC 48 V
Notes:Waterproof box+Meanwell power supply
+gouly Controller+Protection Circuit+Carton packaging



WB171-W-12V-PRO

Product Name: Lighting Control System
Logo Customization: Available
Output per Channel: 5 A / 60 W,
Input Voltage (v):AC100-240V
Rated Power: 350 W / 450 W / 600 W
Size (mm):324.65 × 217.28 × 137.5mm
Output voltage:DC 12 V
Notes:Waterproof box+Meanwell power supply,
+gouly Pro Controller+Protection Circuit
+4-wire terminal block+Carton packaging



WB171-W-24V-PRO

Product Name: Lighting Control System
Logo Customization: Available
Output per Channel: 5 A / 60 W,
Input Voltage (v):AC100-240V
Rated Power: 350 W / 450 W / 600 W
Size (mm):324.65 × 217.28 × 137.5mm
Output voltage:DC 24 V
Notes:Waterproof box+Meanwell power supply,
+gouly Pro Controller+Protection Circuit
+4-wire terminal block+Carton packaging



WB171-W-36V-PRO

Product Name: Lighting Control System
Logo Customization: Available
Output per Channel: 5 A / 60 W,
Input Voltage (v):AC100-240V
Rated Power: 350 W / 450 W / 600 W
Size (mm):324.65 × 217.28 × 137.5mm
Output voltage:DC 36 V
Notes:Waterproof box+Meanwell power supply,
+gouly Pro Controller+Protection Circuit
+4-wire terminal block+Carton packaging



WB171-W-48V-PRO

Product Name: Lighting Control System
Logo Customization: Available
Parameter:600W/set Output10.5A/route,
504W/route
Input Voltage (v):AC100-240V
Output voltage:600W
Size (mm):324.65 × 217.28 × 137.5mm
Output voltage:DC 48 V
Notes:Waterproof box+Meanwell power supply
+gouly Pro Controller+Protection Circuit
+4-wire terminal block+Carton packaging



WB171-W-48V-1200W-PRO

Product Name: Lighting Control System
Logo Customization: Available
Parameter:1200W/set Output7A/route,
336W/route
Input Voltage (v):AC100-240V
Output voltage:1200W
Size (mm):324.65 × 217.28 × 137.5 mm
Output voltage:DC 48 V
Notes:Waterproof box+Meanwell power supply
+gouly Pro Controller+Protection Circuit
+4-wire terminal block+Carton packaging



Outdoor Landscape Lighting Series

Designed with an integrated lamp head, our landscape lights combine a sleek appearance with reliable performance. The LED light source provides smooth, attractive illumination, while durable cast-aluminum housings and tempered-glass components support reliable outdoor performance. Engineered for outdoor use in rain and snow, these fixtures add distinctive illumination to driveways, pathways, gardens, decks, patios, and other outdoor spaces.

LS6W-RGBW

LED Type:SMD3535RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 6W
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 15°
Size(mm): 85 × 150 × 213mm
Material: Black



LS6W-MR16-RGBW

LED Type: COB RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 6w
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 30°
Size(mm): 85 × 150 × 213mm
Material: Black aluminium



FLP12W

LED Type:SMD3535RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 12W
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 120°
Size(mm): Ø150 × 805mm
Material: Black



UL6W-RGBW

LED Quantity:SMD5054RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 6w
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 120°
Size(mm): Ø180 × 780mm
Material: Brown/Black



SP3W-RGBW

LED Type:SMD5054RGBW
IC Model: UCS2904
Voltage(V): DC 12 V/DC 24 V
Power(W): 3W
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 15°
Size(mm): 65 × 46 × 80mm
Material: Black



LS18W-RGBW

LED Type: SMD5054RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 36W
Color: RGBW color-changing
Beam Angle:15°
IP Rating :IP65
Size L × W × D(mm):140 × 140 × 83mm
Available Finishes: Silver, white, or black



DLW-24V-36W

LED Type: SMD5054RGBW
IC Model: UCS512C4
Voltage(V): DC 24 V
Power(W): 36W
Color: RGBW color-changing
Beam Angle:15°
IP Rating :IP65
Size L × W × D(mm):250 × 158 × 211.5 × mm
Material: Black



UD3W-RGBW/UD6W-RGBW/UD9W-RGBW

LED Type: SMD3535RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 3W/6W/9W
Color: RGBW color-changing
Beam Angle:15°
IP Rating :IP65
Size L × W × D(mm):Ø100 × H115mm
Light Output Directions: One-way / two-way / four-way
Material: Black cast aluminum+304 Face Cover



UD6W-RGBW

LED Type: SMD3535RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 6W
Color: RGBW color-changing
Beam Angle:60°
IP Rating :IP65
Size L × W × D(mm):Ø120 × 100mm
Housing: Black die-cast aluminum with a 304 stainless-steel faceplate



HT6W-RGBW

LED Type: 12pcs SMD 5050 RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 6W
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 15°
Size(mm): 223 × 65 × 50mm
Material:die-cast aluminum



RPL6W-RGBW

LED Quantity: COB
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 6W
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 180°
Size(mm): Ø120 × 483mm
Material:6063 Aluminum + Acrylic



PL12W-RGBW PL6W-RGBW

LED Quantity: COB , 6pcs SMD5054RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 6W,12W
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 120°
Size(mm): 141 × 141 × 810mm,100 × 100 × 594mm
Material:6063 Aluminum + Acrylic



FLG3W-RGBW-24V

LED Quantity: SMD3535RGBW/3PCS
IC Model: UCS2904/1PCS
Voltage(V): DC 24 V
Power(W): 3W
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 120°
Size(mm): 60 × 60 × 590mm
Housing Material: ADC12 Die-Cast Aluminum



GMS18W-RGBW-24V

LED Quantity: SMD5054RGBW/24PCS
IC Model: UCS2904/4PCS
Voltage(V): DC 24 V
Power(W): 18W
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 180°
Size(mm): Ø210 × 277mm
Housing Material: ADC12 Die-Cast Aluminum



WA6W-RGBW

Material: Glass and 6063 aluminum
LED Type:RGB COB
Voltage(V):DC85V-265V
Luminous Angle:38°
Size L × W × D(mm):50 × 140mm
Materials:Aluminum
IP Rating:IP65
Housing Color: Black
light color: RGBW



WA6W-RGBW 2 IC

Material: Glass and 6063 aluminum
LED Quantity: 2PCS COBRGBW
Power: 6W/pcs
Voltage(V):DC 24 V
IC Model:UCS2904
Beam Angle:38°
IP Rating:IP65
Color:RGBW color-changing
Material:Aluminum
Housing Color: Black
light color: RGBW
Size L × W × D(mm) :63.5 × 50.5 × 143mm



WY6W-RGBW

LED Type:SMD5054RGBW
Voltage(V):DC 24 V
Luminous Angle:180°
IC Model:UCS2904BL
Size L × W × D(mm):Ø62 × 312mm
Materials:Aluminum +PC
IP Rating:IP65
Shell Color:Milky White
Color:RGBW chasing color




Fot6W-RGBW

Product name:LED Footlights
Led Quantity:SMD5054RGBW
Size (mm):255 × 53 × 75mm
Power:6W
IP Rating:IP65
IC Model:UCS2904B
Output voltage:DC 24 V
Angle of illumination:30°
Color:RGBW chasing color



WAL-RGBW-24V

LED Quantity: 3 LEDs 5050RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 0.96 W/pc
Color: RGBW color-changing
IP Rating :IP68
Beam Angle: 24°
Size(mm): 101 × 100.6 × 60mm



WALL6W-RGBW

LED Type:SMD5054RGBW
Voltage(V):DC 24 V
Power(W):6W
IC Model:UCS2904BL
Color:RGBW color-changing
Rotation angle:360°
IP Rating:IP67
Beam Angle:120°
Size L × W × D(mm):200 × 107 × 32mm
Material: Aluminum and 304 stainless steel
Housing Color: Black



CY3W-RGBW

LED Type: SMD5054RGBW
IC Model: UCS2904B
Voltage(V): DC 24 V
Power(W): 3W
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 360°
Size(mm): 85 × 100 × 510mm
Material:6063 Aluminum + Acrylic



CH3W-RGBW

LED Type: SMD5054RGBW
IC Model: UCS2904B
Voltage(V): DC 24 V
Power(W): 3W
Color: RGBW color-changing
IP Rating :IP65
Beam Angle:180°
Size(mm): Ø100 × 543mm
Material:6063 Aluminum + Acrylic



LED Wall Washer Light Series

Full-color RGB with 16 million chromatic options and thousands of programmable patterns.
Adjustable brightness and high-speed dynamic color changing for stunning visual effects.
Widely Applied in indoor and outdoor projects: architectural lighting, hotels, billboards, bridges, churches, flagpoles, signage, gardens, and landscape illumination.
Perfect for weddings, birthdays, and festive decorations including Halloween, Christmas, and Carnival.

LW-36W-HV-UCS2904B

Product name:LED Wall Washer Light
Scene Mode:24/36LED/PCS
Output voltage:AC110V-240V/DC 24 V
Size (mm):990 × 58 × 73mm
Material:Glass and 6063 aluminum
Power:24/36W/ PCS
IP Rating:IP67
IC Model:UCS2904B/UCS512C4
Luminescence angle:60°
Color:RGBW



LN48-24V-RGBW

Product name:LED Line Lights
Led Quantity:48PCS 5054RGBW
Lighting Group:2LED/group
Power:15W/pcsSize (mm):1000 × 38 × 48mm
Material:PMMA and 6063 aluminum
IP Rating:IP68
IC Model:UCS512C0
Output voltage:DC 24 V
Angle of illumination:240°
Color:RGBW



MT12W-RGBW-24V

Product name:LED Meteor Light
Led Quantity:48PCS 5054RGBW
Lighting Group:2LED/group
Power:12W/pcs
Size L × W × D(mm):035.3 × 1056.3mm
Working Temperature:-40°C- 60°C
Material:PC
IP Rating:IP65
IC Model:UCS2904B
Output voltage:DC 24 V
Angle of illumination:360°
Color:RGBW chasing color



Brass Landscape Lamp Series

Designed with brilliant RGB+W color-changing technology, our brass landscape lamps fill your outdoor haven with stunning, magical light. Breathe life into your garden, patio, pathways and every corner of your landscape with captivating, ever-changing illumination.

BALS-7W

LED Type: 7W MR16
IC Model:
Voltage(V): AC/DC 12 V
Power(W): 7W
Color: 2700K
IP Rating :IP65
Beam Angle: 15°
Size(mm): Ø62 × 418mm
Material:Brass



BALS-RGBW-15W

LED Type: 15W COBRGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 15W
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 60°
Size(mm): 118 × 130 × 405mm
Material:Brass



BALS-MR16-RGBW

LED Type: COB RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 6W
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 30°
Size(mm): Ø62 × 418mm
Material:Brass



LS6W-MR16-RGBW-BS

LED Type: COB RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 6W
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 30°
Size(mm): Ø65 × 104mm
Material:Brass



LS12W-MR16-RGBW-BS

LED Type: COB RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 12W
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 30°
Size(mm): Ø62 × 418mm
Material:Brass



UL3W-MR16-RGBW-BS

LED Type: COB RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 3w
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 30°
Size(mm): Ø152 × 695mm
Material:Brass



UD6W-MR16-RGBW-BS-1

LED Type: COB RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 6w
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 30°
Size(mm): Ø102 × 152mm
Material:Brass



WA12W-MR16-RGBW-BS

LED Type: COB RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 12W/pcs
Color: RGBW color-changing
Material: Brass
IP Rating :IP65
Beam Angle: 38°
Size(mm): 101 × 100.6 × 60mm



UW6W-MR16-RGBW-BS

LED Type: COB RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 6w
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 30°
Size(mm): Ø97 × 163mm
Material:Brass



UD6W-MR16-RGBW-BS

LED Type: COB RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 6w
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 30°
Size(mm): Ø102 × 130mm
Material:Brass



HA6W-MR16-RGBW-BS

LED Quantity: 1PCS 5054RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 6w
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 30°
Size(mm): Ø54 × 187mm
Material:Brass



TO3W-MR16-RGBW-BS

LED Type: 3PCS SMD5054RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 3W
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 30°
Size(mm): Ø205 × 1900mm
Material:Brass



UL3W-MR16-RGBW-BS1

LED Quantity: 3PCS SMD5054RGBW
IC Model: UCS2904
Voltage(V): DC 24 V
Power(W): 3W
Color: RGBW color-changing
IP Rating :IP65
Beam Angle: 130°
Size(mm): Ø228.5 × 775mm
uminous flux (physics):298.0 lm
Material:Brass



Signal Amplifier and Sample Display Box Series

GLMD191-AP

Product Name: Signal amplifier
Voltage(V): DC12- 48V
IP Rating :IP68



GLMD176-IS

Product Name: Gouly Radar Motion Sensor
Voltage(V): DC12- 48V
IP Rating :IP68
Sensing angle: 180°
Sensing distance: 3-4M
Detection Targets: People and animals
Features : Radar Sensor
Detects motion and automatically triggers the configured lighting effects.



GLMD176-Box

Product Name: Sample Display Case
LED:glmd176-rgbw 54pcs led light/strings
IC Model:UCS2904
Voltage(V):DC 12 V
Power(W):0.96 W/pc, 11.52W/M
Color:RGBCW Chasing color
Beam Angle:100°
Size(mm):613 × 431 × 178.5 mm
Aluminum track:LED Series Aluminum Track
Sample Box:350W 12V Standard Pixel Light Sample Box



GLMD191-OEM

Product Name: Signal amplifier
Voltage(V): DC12- 48V
IP Rating :IP68



Aluminum Pixel Light Track

GLC001

Product Name: Single-Sided
Aluminum Pixel-Light Track
Thickness: 0.7 mm
Dimensions: 76 × 25 × 1000 mm
Hole Diameter Options:
Ø30 / Ø40 / Ø50 mm



GLC003

Product Name: Double-Sided
Aluminum Pixel-Light Track
Thickness: 0.75 mm
Size: 60 × 20 × 1000 mm
Hole Diameter Options:
Ø30 / Ø40 / Ø50 mm



GLC006

Product Name: Single-Sided
Aluminum Pixel-Light Track
Thickness: 0.85 mm
Size: 54 × 20 × 1000 mm
Hole Diameter Options:
Ø20 / Ø30 mm



GLC008

Product Name: Double-Sided
Aluminum Pixel-Light Track
Thickness: 0.8 mm
Size: 50 × 50 × 1000 mm
Hole Diameter Options:
Ø30 / Ø40 mm



GLC013

Product Name: Double-Sided
Aluminum Pixel-Light Track
Thickness: 0.6 mm
Size: 36 × 17 × 1000 mm
Hole Diameter Options:
Ø20 / Ø30 mm



GLC015

Product Name: Double-Sided
Aluminum Pixel-Light Track
Thickness: 0.6/0.8 mm
Size: 45 × 22 × 1000 mm
Hole Diameter Options: Ø30 mm



GLC017

Product Name: Single-Sided
Aluminum Pixel-Light Track
Thickness: 0.8 mm
Size: 64 × 17 × 1000 mm
Hole Diameter Options:
Ø30 / Ø40 mm




GLC021

Product Name: Double-Sided
Aluminum Pixel-Light Track
Thickness: 0.8 mm
Size: 50 × 29 × 1000 mm
Hole Diameter Options:
Ø30 / Ø40 mm



GLC002

Product Name: Double-Sided
Aluminum Pixel-Light Track
Thickness: 0.8 mm
Size: 40 × 30 × 1000 mm
Hole Diameter Options:
Ø20 / Ø30 mm

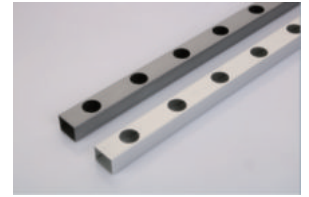

GLC005

Product Name: Double-Sided
Aluminum Pixel-Light Track
Thickness: 0.7, 0.8 mm
Size: 40 × 23 × 1000 mm
Hole Diameter Options:
Ø20 / Ø30 mm



GLC007

Product Name: Single-Sided
Aluminum Pixel-Light Track
Thickness: 0.6 mm
Size: 56 × 20 × 1000 mm
Hole Diameter Options:
Ø20 / Ø30 mm



GLC010

Product Name: Double-Sided
Aluminum Pixel-Light Track
Thickness: 0.6 mm
Size: 40 × 17 × 1000 mm
Hole Diameter Options:
Ø20 / Ø30 mm



GLC014

Product Name: Double-Sided
Aluminum Pixel-Light Track
Thickness: 0.6 mm
Size: 50 × 20 × 1000 mm
Hole Diameter Options:
Ø30 / Ø40 mm



GLC016

Product Name: Raised-Profile
Aluminum Pixel-Light Track
Thickness: 0.8 mm
Size: 64 × 20 × 1000 mm
Hole Diameter Options:
Ø30 / Ø45 mm



GLC018

Product Name: Single-Sided
Aluminum Pixel-Light Track
Thickness: 0.6, 0.9 mm
Size: 76 × 20 × 1000 mm
Hole Diameter Options:
Ø30 / Ø40 / Ø50 mm



GLC032

Product Name: Double-Sided
Aluminum Pixel-Light Track
Thickness: 0.6 mm
Size: 30 × 20 × 1000 mm
Hole Diameter Options:
Ø20 mm



GLC071-12V3CM

Product name:GLM192
Aluminum Track Fittings
Thickness:0.66 (mm)
Size:67.48 × 16.82 × 1000 mm
Hole Diameter Options:
Ø30 mm



GLM160

Product name:GLM166/167
Aluminum Track Fittings
Thickness:0.5 (mm)
Size:33 × 12 × 1000 mm



[Custom aluminum pixel-light track design and mold development are available.]

Connector and Extension Cable Series



T-Connector with
Two Male Leads



T connector with DC



Dual-Output Connector




Connector Cable Lengths:
1 ft / 2 ft / 5 ft / 10 ft / 20 ft



4-Wire T-Shaped Cable



4-Wire T-Shaped Cable

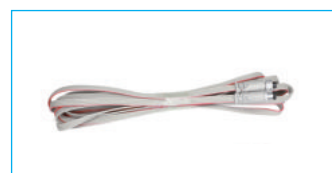

4-Wire connector
5ft/10ft/20ft



4-Wire T-Shaped Cable
U-Shaped Terminal Connector




4-Wire T-Shaped Cable
DC




3-Wire T-Shaped Cable



Parallel Wire
Connector (2-core)

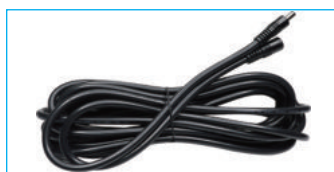

20 ft Male-to-Female
DC Extension Cable

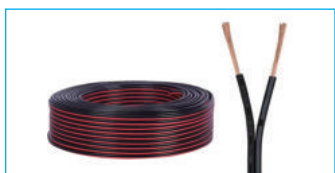

2-Core Power Cable



Shielded Signal
Extension Cable



Power Connector




End Cap




Wire Nut Connector



Terminal Blocks

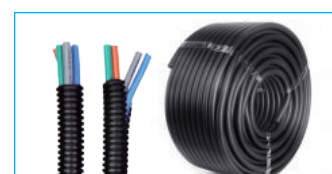

Flexible Cable Conduit

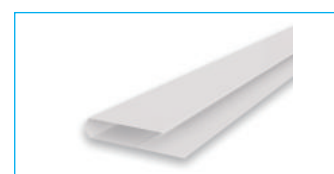

Slim Aluminum Cable Track for
Extension-Wire Protection



Contact Information

WeChat: lilygouly

Mobile / WhatsApp: 181 2392 3045

Tel.: +86 755 2805 8067

Websites: www.goulylight.com and www.gouly-led.com

Factory Website: www.goulyled.com

Address: 2/F, Building 3, No. 23 Jinhuwan Industrial Park,
Fucheng Subdistrict, Longhua District, Shenzhen, China

 lily 韦丽
Shenzhen, Guangdong



Scan QR code to add me as a friend.



Scan the QR code to start a WhatsApp chat with Lily.